

ITCO

ASSEMBLY INSTRUCTIONS


ITEM: 1407-SC/RV-CH-R1350C-CHL-RTA

DESCRIPTION: 1407-SC SIDE CHAIR

SKU: 42414071

Thank you for purchasing this quality product. Be sure to check all packing material for small parts which may have come loose inside carton during shipment. Identify and count all parts and compare with the hardware list as below:

| | No. | Picture | Description | Dimension | Qty |
|---------------|-----|--|-----------------------|--------------------|-------|
| Hardware List | 1 | 92P | JCBC (M6) with washer | 6 x P1.0 x 40mm | 2 Pcs |
| | 2 | 9 | JCBC (M6) with washer | 6 x P1.0 x 70mm | 4 Pcs |
| | 3 | (| Hex Nut | 5/16" x 18T x 1/2" | 4 Pcs |
| | 4 | 0 | Spring Washer | 1.5 x 14mm | 4 Pcs |
| | (5) | 0 | Flat Washer | 1.5 x 22mm | 4 Pcs |
| | 6 | \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\ | C.S.K Screw (M4) | 4 x 38mm | 4 Pcs |
| | 7 | | Allen Key (M4) | 4 x 58mm | 1 Pc |
| | 8 | 12.8 | Wrench | 2 x 82mm | 1 Pc |
| | No. | Description | | | Qty |
| Parts List | A | Back Rest | | | 1 Pc |
| | В | Cushion Seat | | | 1 Pc |
| | C | Front Leg | | | 2 Pcs |
| | D | Stretcher | | | 2 Pcs |

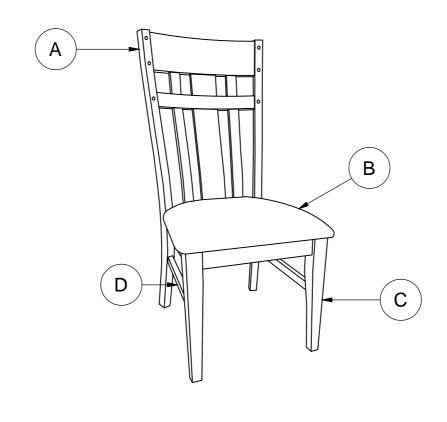


PARTS DETAIL

Assembly steps


STEP 1

Assemble seat frame to the backrest.

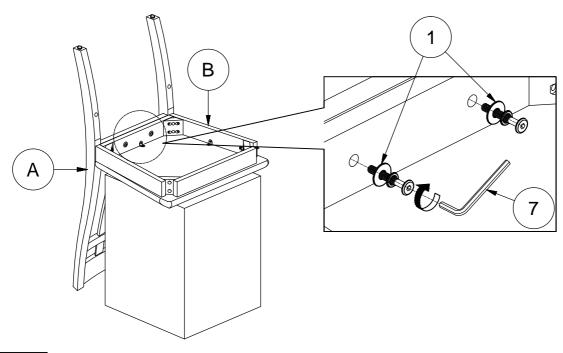

STEP 2

Assemble front legs to the seat frame with stretcher. **DO NOT FULLY TIGHTEN THE SCREW UNTIL STEP 3**.

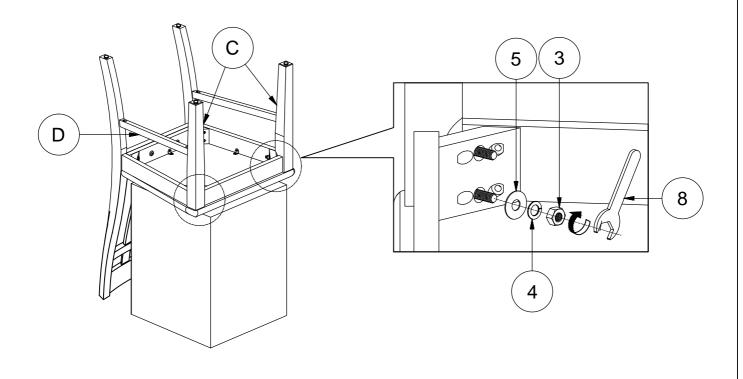


NOTE:

To ensure that chair is levelled, assemble the chair on flat & soft surface. DO NOT tighten all the screws & bolts until the chair been adjust & level all the legs so that they do not wobble. Once adjusted then only tighten all the screws using Allen Key while making sure the unit remain level.

Assembly steps


STEP 3

Assemble seat frame to the backrest.

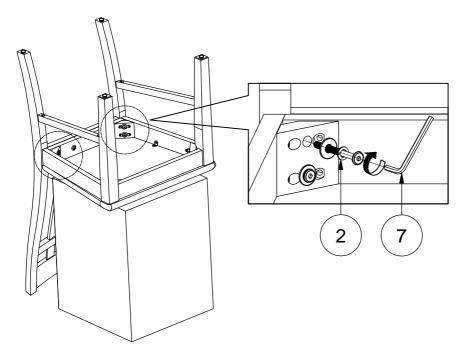

STEP 4

Assemble stretcher to the backrest.

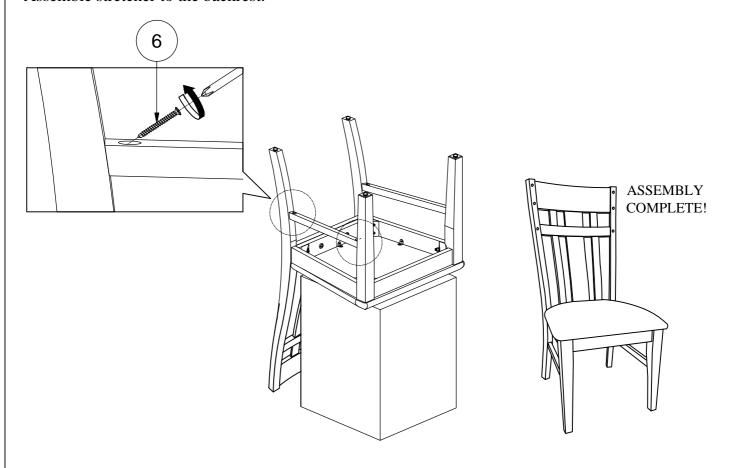

NOTE:

To ensure that chair is levelled, assemble the chair on flat & soft surface. DO NOT tighten all the screws & bolts until the chair been adjust & level all the legs so that they do not wobble. Once adjusted then only tighten all the screws using Allen Key while making sure the unit remain level.